



PSM SOCKET DIMENSIONS

SIZE	SDR 35 SOLVENT WELD		SDR 35 GASKETED			AIR DUCT SOLVENT WELD	
	SD	OD	SD	OD	C	SD	OD
4" MOLDED (A)	1.80	4.60	2.29	5.00	1.75		
4" MOLDED (B)	1.80	4.60	2.62	5.00	2.06		
4" FABRICATED	1.75	4.50	2.75	5.10	1.93		
5" FABRICATED	3.00	6.00	3.62	6.87	2.37		
6" MOLDED (A)	3.00	6.80	3.09	7.10	2.53		
6" MOLDED (B)	3.18	6.80	4.00	7.10	3.44		
6" FABRICATED	3.00	6.70	3.75	7.42	2.28	3.00	6.50
8" MOLDED	4.00	9.04	3.75	9.46	3.00		
8" FABRICATED	4.00	8.95	4.37	9.85	2.72	4.00	8.80
10" FABRICATED	5.00	11.12	5.00	12.10	3.22	5.00	10.90
12" FABRICATED	6.00	13.30	5.00	14.15	3.25	6.00	13.00
15" FABRICATED	7.50	16.30	5.25	17.50	3.33	7.50	15.90
18" FABRICATED	9.00	19.85	7.00	20.60	4.50		
21" FABRICATED	10.50	23.60	8.50	24.10	5.12		
24" FABRICATED	12.00	26.44	9.00	27.20	5.50		
27" FABRICATED	13.50	29.75	10.00	30.90	6.00		

4" MOLDED (A)

- 4" x 22 1/2
- 4" x 45
- 4" x 90
- 4" Tee
- 4: wye
- 4" Tee-Wye
- 6" x 4" Tee
- 6" x 4" Tee-Wye
- 8" x 4" Wye
- 8" x 4" Tee
- 8x4 Tee-Wye

4" MOLDED (B)

- 4" Cap
- 4" Coupling
- 4" Repair Coupling
- 6" x 4" Wye
- 4" x 6" Increaser


6" MOLDED (A)

- 6" Wye
- 6" Tee
- 8" x 6" Wye
- 8" x 6" Tee
- 8" x 6" Tee-Wye

6" MOLDED (B)

- 6" x 22 1/2
- 6" x 45
- 6" x 90
- 6" Cap
- 6" Coupling
- 6" Repair Coupling
- 4" x 6" Increaser
- 6" x 4" Tee
- 6" x 4" Tee-Wye
- 6" Tee-Wye

NOTE: SOCKET DEPTHS FOR PSM SDR 26 HWS ARE THE SAME AS SDR 35 PSM

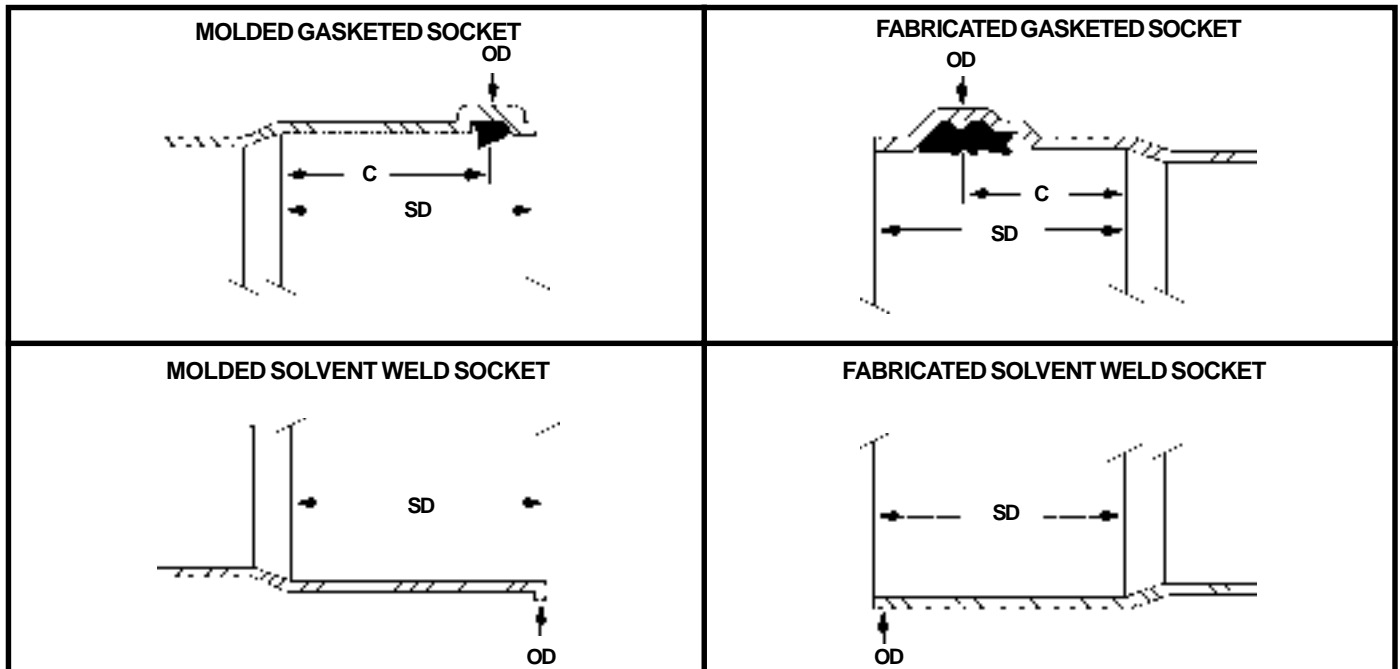



O.D.'S & WALL THICKNESS

SIZE	3034/SDR35		3034/SDR26		3034 OD AIR DUCT		F 679		MIN. WALL PS115
	OD	WALL	OD	WALL	OD	WALL	OD	MIN. WALL PS46	
4"	4.215	.120	4.215	.162					
5"	5.640	.161							
6"	6.275	.180	6.275	.241	6.275	.100			
8"	8.400	.240	8.400	.323	8.400	.125			
10"	10.500	.300	10.500	.404	10.500	.150			
12"	12.500	.360	12.500	.481	12.500	.180			
15"	15.300	.437	15.300	.588	15.300	.220			
18"							18.701	.499	.671
21"							22.047	.588	.791
24"							24.803	.661	.889
27"							27.953	.745	1.002
30"							32.00	.853	1.148

PIPE DIAMETERS

	4"	5"	6"	8"	10"	12"	14"	15"	16"	18"	20"	21"	24"	27"	30"	36"	42"	48"	54"
P.I.P.	4.130		6.140	8.160	10.200	12.240		15.300											
I.P.S.	4.500	5.563	6.625	8.625	10.750	12.750	14.000		16.000	18.000	20.000		24.000		30.000	36.000			
C 900 / C 905	4.800		6.900	9.050	11.100	13.200	15.300		17.400	19.500	21.600		25.800		32.000	38.300	44.500	50.800	
Ultra Corr™													25.58	28.86	32.15	38.74			
Vylon® H.C.												22.110	25.115	28.232	31.415	37.800	44.200	50.570	56.96
Ultra-Rib™				8.81	11.02	13.10		15.91		19.45		22.92	25.76	29.14	32.37				
Pro21															31.606	38.036	44.200	50.057	